


Nitrided Ejector Pins

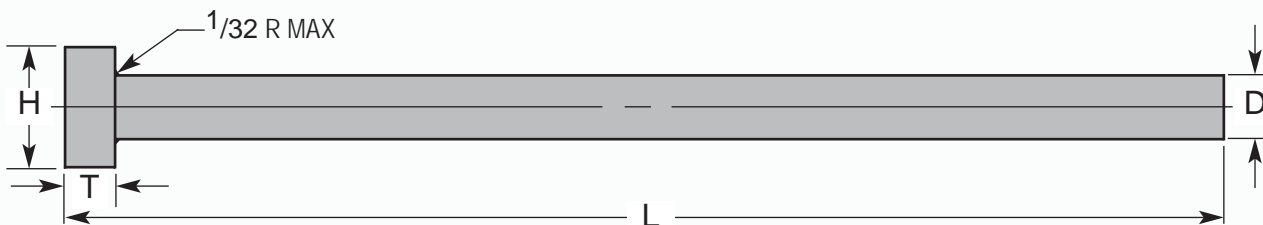

- Precision ground hotwork steel
- Surface nitrided to 65 - 74 Rc
- Core hardness of 35 - 40 Rc
- 4 - 10 micro-inch finish minimizes wear & prolongs life
- All heads annealed
- **Etched for Easy Identification**

Tolerances	
Pin Diameter (D)	+0.000 -0.001
Head Diameter (H)	+0.000 -0.010
Head Thickness (T)	+0.000 -0.002
Length (L)	+0.062 -0.000

CATALOG NUMBER	D PIN DIA	H HEAD DIA	T HEAD THICK	L = LENGTH										
				6"		10"		14"		18"		25"	36"	39"
				STD	.005 OS	STD	.005 OS	STD	.005 OS	STD	.005 OS	STD	STD	STD
NP9-	1/8	1/4	1/8	•	•	•	•	•	•	•	•			
NP10-	9/64	1/4	1/8		•		•							
NP11-	5/32	9/32	5/32	•	•	•	•	•	•	•	•			
NP12-	11/64	11/32	3/16		•		•							
NP13-	3/16	3/8	3/16	•	•	•	•	•	•	•	•			•
NP14-	13/64	3/8	3/16		•		•							
NP15-	7/32	13/32	3/16	•	•	•	•				•			
NP16-	15/64	13/32	3/16		•		•							
NP17-	1/4	7/16	3/16	•	•	•	•	•	•	•	•	•		•
NP18-	17/64	7/16	1/4		•		•				•			
NP19-	9/32	7/16	1/4	•	•	•	•			•	•			
NP20-	19/64	1/2	1/4		•		•							
NP21-	5/16	1/2	1/4	•	•	•	•	•	•	•	•	•		
NP22-	21/64	9/16	1/4		•		•				•			
NP23-	11/32	9/16	1/4	•	•	•	•				•			
NP24-	23/64	5/8	1/4		•		•							
NP25-	3/8	5/8	1/4	•	•	•	•	•	•	•	•	•	•	•
NP27-	13/32	11/16	1/4	•	•	•	•			•		•		
NP29-	7/16	11/16	1/4	•	•	•	•	•	•	•	•	•	•	
NP31-	15/32	3/4	1/4		•		•			•	•			
NP33-	1/2	3/4	1/4	•	•	•	•	•	•	•	•	•	•	•
NP35-	9/16	13/16	1/4	•	•		•			•	•			
NP37-	5/8	7/8	1/4	•	•		•			•	•	•	•	•
NP39-	11/16	15/16	1/4		•		•			•	•			
NP41-	3/4	1	1/4	•	•		•			•	•	•	•	•
NP45-	7/8	1 1/8	1/4		•					•	•			
NP47-	1	1 1/4	1/4	•	•		•			•	•	•	•	•

For oversize add "OS" to the end of the catalog number (i.e. NP9-14OS)

