



Date Inserts

Standard

Patented Cumsa System

What's Important

EASY YEAR CHANGE

- Simply insert screwdriver in arrow slot & turn counter clockwise until insert is removed
- Replace with new year arrow insert and turn clockwise approximately 8 times until unit clicks

EASY MONTH CHANGE



- Simply insert screwdriver into arrow slot & turn clockwise
- Insert remains flush with surface regardless of the number of clockwise turns
- Manufactured from 420 Stainless
- Hardened to 45 - 50 Rc



ADJUSTMENT OF YEAR / ARROW INSERT

To replace the insert, turn screwdriver counterclockwise. Insert year can be changed while mold remains in the press. To adjust the insert, turn the screwdriver clockwise.

MANUFACTURED FOR USE WITH PCS REPLACEMENT ARROWS ONLY

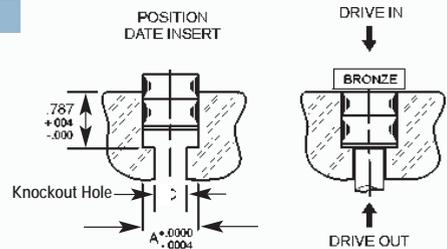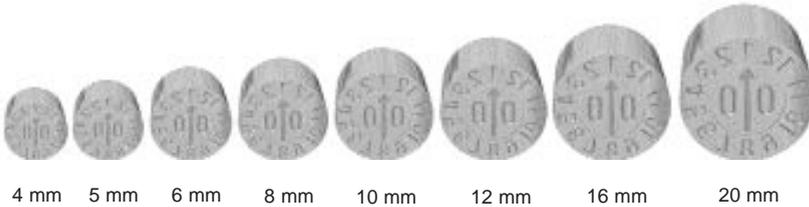

Hole dimensions & installation

Drill a hole per the specifications listed. Insert has a tapered portion to allow partial entry into the drilled hole. Use a bronze block against the insert face and drive down into position.

Standard date inserts designed for "easy year change." Eight sizes for your needs!

Home of the Hardened Throughout™ Pin

