
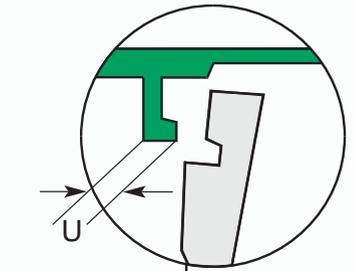




Retractable Core

For Undercuts

Patented CUMSA System

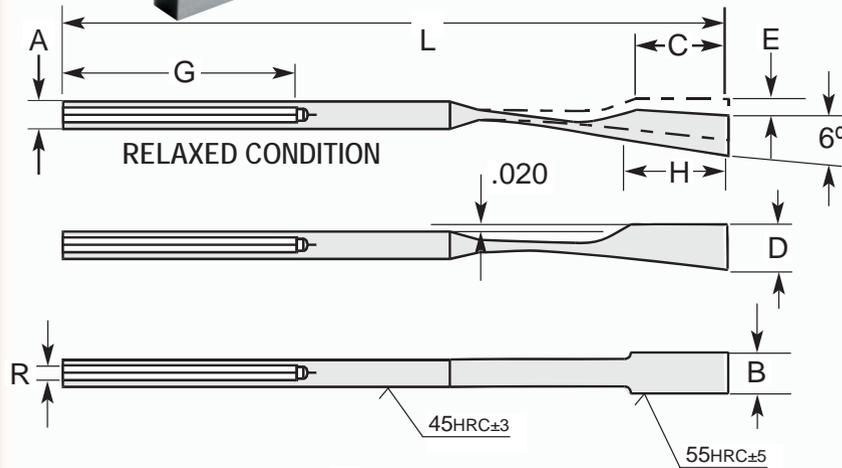

RETRACTABLE CORE FLEXES AWAY FROM THE MOLDED UNDERCUT IN AN ARCING MOTION AS THE EJECTOR PLATE(S) TRAVEL FORWARD

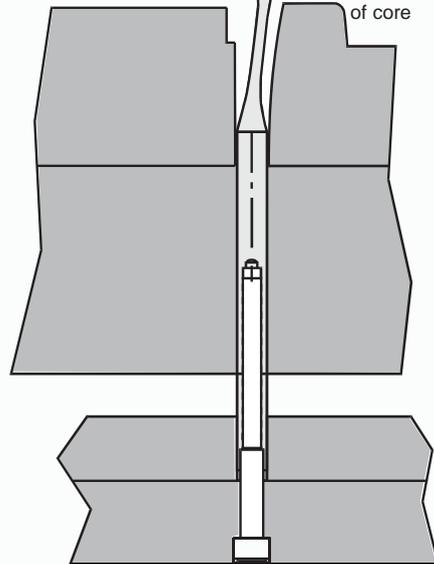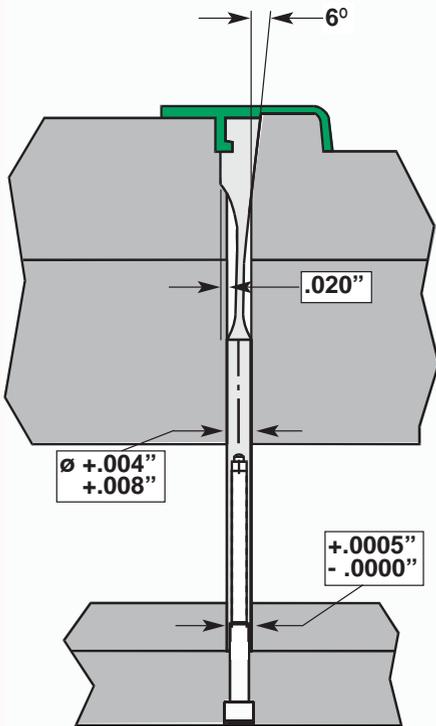

U.S. Standard									
CATALOG NUMBER	A +.0000 -.0004	B +.004	C ±.040	D +.004	E ±.004	G	H	L +.080	R
RC-1	1/4	.322	.868	.354	.145	1.575	.984	6.0	8-32
RC-2	5/16	.401	1.013	.453	.177	1.965	1.190	7.0	10-24
RC-3	5/16	.480	1.013	.453	.177	1.965	1.190	7.0	10-24

For Metric Sizes
Please see the
Cumsa Section
page I 15.

MAINTENANCE

Due to the nature of this product, it is recommended that the part be regularly checked for wear and fatigue (replaced when necessary) PCS accepts no responsibility for loss or damage caused by incorrect fitting or failure.

Home of the Hardened Throughout™ Pin

