


Gib Assemblies Base Plate, Self-Lubricating

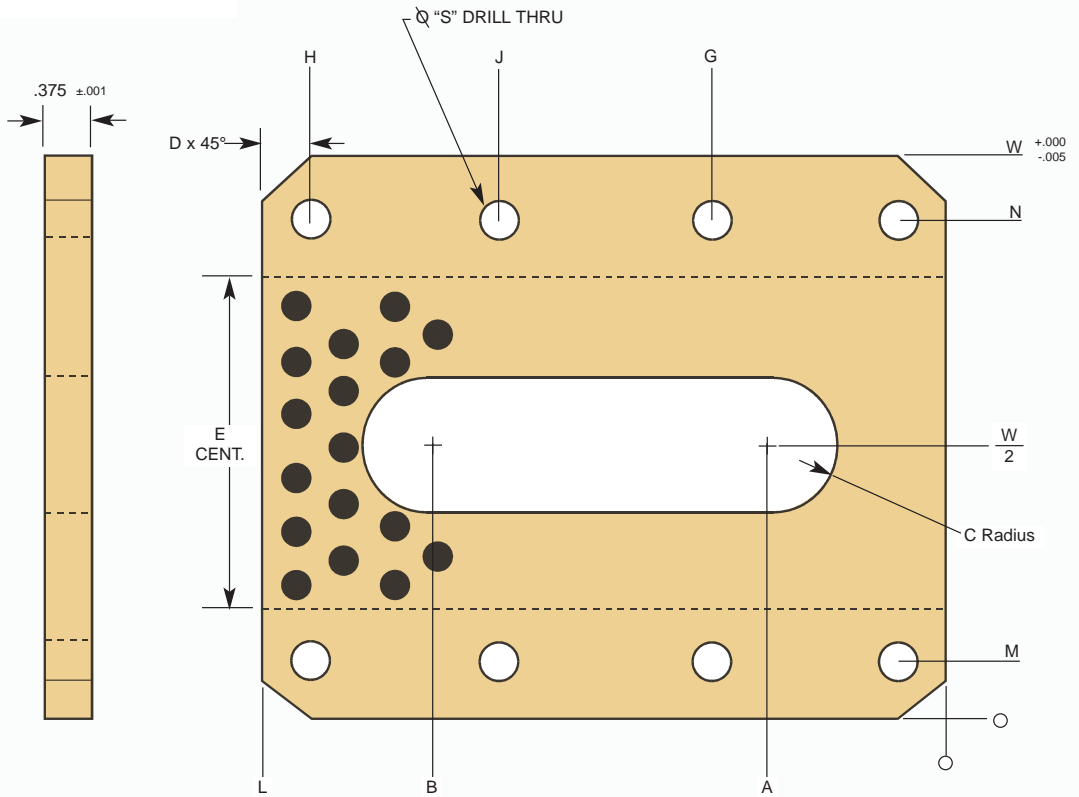

MATERIAL: Self-Lube Aluminum Bronze
Hole Locations Held ±.005

CHAMFERED BASES	L	W	A	B	C	D	E	G	H	J	M	N	HOLES	S
2GAB16GT	2.00	2.6200	0.69	1.31	0.38	0.26	1.50		1.625		0.28	2.34	4	0.28
2GAB24GT	3.00	2.6200	0.88	2.12	0.38	0.26	1.50		2.625		0.28	2.34	6	0.28
2GAB32GT	4.00	2.6200	1.00	3.00	0.38	0.26	1.50	2.000	3.625		0.28	2.34	6	0.28
3GAB24GT	3.00	3.1200	1.00	2.00	0.38	0.26	1.68		2.625		0.38	2.74	4	0.38
3GAB32GT	4.00	3.1200	1.00	3.00	0.50	0.26	1.68	2.000	3.625		0.38	2.74	6	0.38
3GAB40GT	5.00	3.1200	1.00	4.00	0.50	0.26	1.68	2.500	4.625		0.38	2.74	6	0.38
4GAB24GT	3.00	4.1200	1.00	2.00	0.50	0.32	2.44		2.625		0.50	3.62	4	0.38
4GAB32GT	4.00	4.1200	1.00	3.00	0.50	0.32	2.44	2.000	3.625		0.50	3.62	6	0.38
4GAB40GT	5.00	4.1200	1.00	4.00	0.50	0.32	2.44	2.500	4.625		0.50	3.62	6	0.38
4GAB48GT	6.00	4.1200	1.00	5.00	0.50	0.32	2.44	2.125	5.625	3.875	0.50	3.62	8	0.38
6GAB32GT	4.00	4.6200	1.00	3.00	0.50	0.32	2.75	2.000	3.625		0.56	4.06	6	0.38
6GAB40GT	5.00	4.6200	1.00	4.00	0.50	0.32	2.75	2.500	4.625		0.56	4.06	6	0.38
6GAB48GT	6.00	4.6200	1.00	5.00	0.50	0.32	2.75	2.130	5.625	3.875	0.56	4.06	8	0.38

Tolerances are ± .010 unless otherwise indicated