
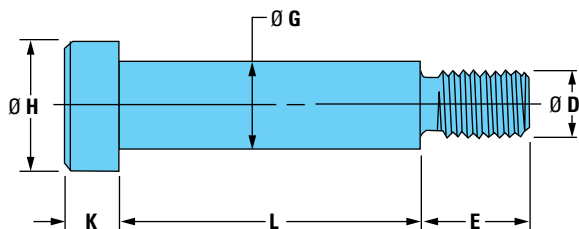


Socket Head Stripper Bolts – Inch Keys and Key Kits – Inch

Socket Head Stripper Bolts

These Socket Head Stripper Bolts (Shoulder Screws) are made from high-grade alloy steel, heat treated to 36 HRC minimum. Tensile strength: 160,000 psi.

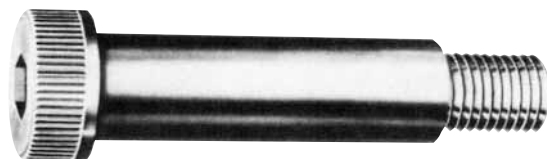

- Concentricity between diameters G and H is within .005" T.I.R.
- Tolerance of Ø G is $-.002$ to $-.004$



G SHOULDER DIAMETER	1/4	5/16	3/8	1/2	5/8	3/4
D THREAD	NO. 10-24	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11
E THREAD LENGTH	3/8	7/16	1/2	5/8	3/4	7/8
H HEAD DIAMETER	3/8 $^{+.000}$ $_{-.018}$	7/16 $^{+.000}$ $_{-.019}$	9/16 $^{+.000}$ $_{-.019}$	3/4 $^{+.000}$ $_{-.021}$	7/8 $^{+.000}$ $_{-.022}$	1" $^{+.000}$ $_{-.023}$
K HEAD HEIGHT	3/16 $^{+.000}$ $_{-.006}$	7/32 $^{+.000}$ $_{-.006}$	1/4 $^{+.000}$ $_{-.006}$	5/16 $^{+.000}$ $_{-.006}$	3/8 $^{+.000}$ $_{-.007}$	1/2 $^{+.000}$ $_{-.008}$
HEX HOLE ACROSS FLATS	1/8	5/32	3/16	1/4	5/16	3/8

L SHOULDER LENGTH	SHOULDER DIA. G					
	1/4	5/16	3/8	1/2	5/8	3/4
1	●	●	●	●		
1 1/4	●	●	●	●	●	
1 1/2	●	●	●	●	●	●
1 3/4		●	●	●	●	●
2		●	●	●	●	●
2 1/4			●	●	●	●
2 1/2			●	●	●	●
2 3/4			●	●	●	●
3			●	●	●	●
3 1/4			●	●	●	●
3 1/2			●	●	●	●
3 3/4			●	●	●	●
4			●	●	●	●
4 1/4				●	●	●
4 1/2				●	●	●
4 3/4				●	●	●
5				●	●	●
5 1/2					●	●
6					●	●
7						●

● = in stock

Keys and Key Kits – KK, LAK

The .050 to 3/8 keys are sold in a 13-piece kit; 1/2 to 3/4 keys are sold individually as detailed at right.

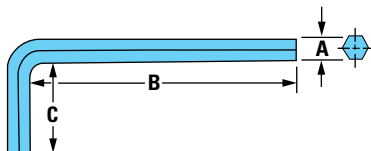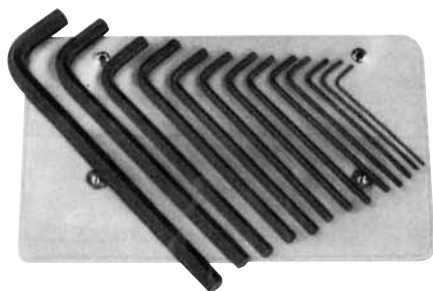

CAP SCREW	STRIPPER BOLT	PRESS. PLUG	A	B	C	ITEM NUMBER
NO. 0			.050	2.844	.531	KK-13 <small>(13-PIECE KIT, .050 TO 3/8 ACROSS FLATS AS DETAILED)</small>
NO. 1			1/16	3.000	.562	
NO. 2 & 3			5/64	3.188	.609	
NO. 4 & 5			3/32	3.375	.656	
NO. 6			7/64	3.562	.703	
	1/4		1/8	3.750	.750	
NO. 8			9/64	3.960	.796	
NO. 10	5/16		5/32	4.125	.844	
1/4	3/8	1/8	3/16	4.500	.938	
			7/32	4.875	1.031	
5/16	1/2	1/4	1/4	5.250	1.125	
3/8	5/8	3/8	5/16	6.000	1.250	
1/2	3/4	1/2	3/8	6.750	1.375	
5/8			1/2	8.250	1.625	LAK-12
		3/4	9/16	9.000	1.750	LAK-916
3/4		1"	5/8	9.750	1.875	LAK-58
1"			3/4	11.250	2.125	LAK-34

