


Jiffy-Tite® Connectors

D-M-E Jiffy-Tite plugs used with D-M-E Jiffy-Tite (flow-thru type) Sockets and D-M-E Jiffy-Matic (automatic shut-off type) Sockets are designed for use with plastics molds and die-cast dies in water, air or oil lines. They feature a combination brass and stainless steel leakproof construction; have a maximum rated capacity of 200 psi; and withstand temperatures up to 400°F, with supplied Viton seals. D-M-E Jiffy-Tite and Jiffy-Matic Sockets can be used interchangeably with the same Jiffy-Tite Plugs already in your mold or die. Comparable sizes of both type sockets have the same O.D., permitting interchangeability even when the plugs are flush mounted.



Jiffy-Tite® Sockets – JS (Flow-Thru Type)




D-M-E Jiffy-Tite Sockets have a large thru hole to provide unrestricted flow. These quick-connection couplers are available with either straight, 45° or 90° hose stems, or standard female or male NPT threads.











D-M-E Jiffy-Tite and Jiffy-Matic Sockets have the same O.D., permitting complete interchangeability with Jiffy-Tite Plugs installed in your mold or die.

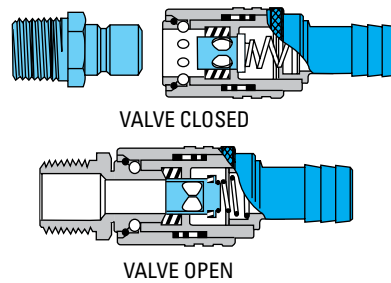The Jiffy-Tite or Jiffy-Matic Sockets can be used with either male, female or extension plugs.

Jiffy-Matic® Sockets – JS (Automatic Shut-Off Type)



D-M-E Jiffy-Matic Sockets open automatically when connected and shut off automatically when disconnected. Unlike most valve-type connectors, Jiffy-Matic Sockets are designed to keep flow restriction to a minimum.


JIFFY-TITE SOCKETS				JIFFY-MATIC SOCKETS		
DESCRIPTION	ITEM NUMBER	FITS HOSE I.D. OR PIPE THREAD	HOSE STEM I.D. OR THRU HOLE	USED WITH STD MALE, FEMALE OR EXTENSION PLUGS	ITEM NUMBER	DESCRIPTION
 STRAIGHT STEM	JS-204	1/4	3/16	JP-(F/B) 250 TO 253	JS-204-V	 STRAIGHT STEM
	JS-205	5/16	1/4	JP-(F/B) 250 TO 253	JS-205-V	
	JS-206	3/8	1/4	JP-(F/B) 250 TO 253	JS-206-V	
	JS-306	3/8	1/4	JP-(F/B) 351 TO 354	JS-306-V	
	JS-308	1/2	3/8	JP-(F/B) 351 TO 354	JS-308-V	
	JS-504	1/2	3/8	JP-(F) 553 TO 556	JS-504-V	
 90° STEM	JS-214	1/4	3/16	JP-(F/B) 250 TO 253	JS-214-V	 90° STEM
	JS-215	5/16	1/4	JP-(F/B) 250 TO 253	JS-215-V	
	JS-216	3/8	1/4	JP-(F/B) 250 TO 253	JS-216-V	
	JS-316	3/8	1/4	JP-(F/B) 351 TO 354	JS-316-V	
	JS-318	1/2	3/8	JP-(F/B) 351 TO 354	JS-318-V	
	JS-514	1/2	3/8	JP-(F) 553 TO 556	JS-514-V	
 45° STEM	JS-224	1/4	3/16	JP-(F/B) 250 TO 253	JS-224-V	 45° STEM
	JS-225	5/16	1/4	JP-(F/B) 250 TO 253	JS-225-V	
	JS-226	3/8	1/4	JP-(F/B) 250 TO 253	JS-226-V	
	JS-326	3/8	1/4	JP-(F/B) 351 TO 354	JS-326-V	
	JS-328	1/2	3/8	JP-(F/B) 351 TO 354	JS-328-V	
	JS-524	1/2	3/8	JP-(F) 553 TO 556	JS-524-V	
 FEMALE NPT THREAD	JS-200	1/8 NPT	1/4	JP-(F/B) 250 TO 253	JS-200-V	 FEMALE NPT THREAD
	JS-300	1/4 NPT	3/8	JP-(F/B) 351 TO 354	JS-300-V	
	JS-500	1/2 NPT	5/8	JP-(F) 553 TO 556	JS-500-V	
 MALE NPT THREAD	JS-201-M	1/8 NPT	1/4	JP-(F/B) 250 TO 253	JS-201-MV	 MALE NPT THREAD
	JS-302-M	1/4 NPT	3/8	JP-(F/B) 351 TO 354	JS-302-MV	
	JS-504-M	1/2 NPT	9/16	JP-(F) 553 TO 556	JS-504-MV	

QUANTITY DISCOUNTS: Jiffy Sockets or Plugs. Discounts apply to current Net Prices. See List Price Adjustment. Standard sizes may be combined on one order for quantity discounts. 50 to 99 Less 15%; 100 or more Less 20%

Jiffy-Tite® Plugs and Extension Plugs

Jiffy-Tite® Plugs – JP



Male Plug Mounting Information

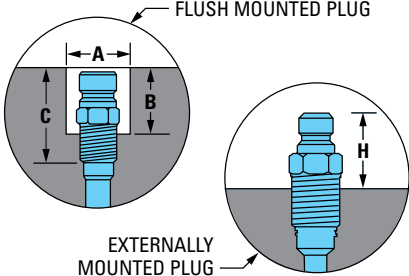


ITEM NUMBER	NPT	HEX SIZE	A	B	C	H
JP-250	1/16	7/16	11/16	11/16	1"	5/8
JP-251	1/8	7/16	11/16	11/16	1"	5/8
JP-252-(SV)	1/4	9/16	27/32	15/16	13/16	7/8
JP-253-(SV)	3/8	11/16	1.000	15/16	11/4	29/32
JP-351	1/8	9/16	1.000	15/16	11/4	7/8
JP-352-(SV)	1/4	9/16	1.000	13/32	17/16	11/32
JP-353-(SV)	3/8	11/16	1.000	11/8	17/16	11/16
JP-354-(SV)	1/2	7/8	13/16	11/4	19/16	13/16
JP-553	3/8	7/8	11/4	13/16	15/8	11/8
JP-554	1/2	7/8	11/4	11/2	113/16	17/16
JP-556	3/4	11/8	11/2	19/16	17/8	11/2

Jiffy-Tite Male – JP and Female Plugs – JPF

For Use with Jiffy-Tite or Jiffy-Matic Sockets (Including SV Series)

DESCRIPTION	LENGTH L	PIPE THREAD	Ø HOLE	HEX SIZE	ITEM NUMBER	USED WITH SOCKETS		
 MALE PLUG (BRASS)	59/64	1/16 NPT	3/16	7/16	JP-250	JS-204-(V/SV) TO JS-226-(V/SV)		
	59/64	1/8 NPT	1/4	7/16	JP-251			
	15/32	1/4 NPT	1/4	9/16	JP-252			
	 FEMALE PLUG** (BRASS)	13/16	3/8 NPT	1/4	11/16	JP-253	JS-306-(V/SV) TO JS-328-(V/SV)	
		13/16	1/8 NPT	1/4	9/16	JP-351		
		125/64	1/4 NPT	3/8	9/16	JP-352	JS-504-(V) TO JS-526-(V)	
		125/64	3/8 NPT	3/8	11/16	JP-353		
		137/64	1/2 NPT	3/8	7/8	JP-354		
			19/16	3/8 NPT	7/16	7/8	JP-553	JS-504-(V) TO JS-526-(V)
			13/4	1/2 NPT	5/8	7/8	JP-554	
13/4			3/4 NPT	5/8	11/8	JP-556	JS-204-(V/SV) TO JS-226-(V/SV)	
1"			1/16 NPT	1/4	1/2	JPF-0250		
1"			1/8 NPT	1/4	1/2	JPF-0251		
19/32	1/4 NPT		1/4	5/8	JPF-0252			
113/32	3/8 NPT		1/4	3/4	JPF-0253			
19/32	1/8 NPT		11/32	5/8	JPF-0351	JS-306-(V/SV) TO JS-328-(V/SV)		
131/64	1/4 NPT		3/8	5/8	JPF-0352			
137/64	3/8 NPT		3/8	3/4	JPF-0353	JS-504-(V) TO JS-526-(V)		
149/64	1/2 NPT	3/8	15/16	JPF-0354				
111/16	3/8 NPT	9/16	15/16	JPF-0553	JS-504-(V) TO JS-526-(V)			
149/64	1/2 NPT	5/8	15/16	JPF-0554				
149/64	3/4 NPT	5/8	11/8	JPF-0556				



Male Plug




Female Plug

All Male Plugs (including SV-Series) and Extension Plugs are now supplied with Jiffy-Seal™ thread sealant. Eliminating the initial need for joint tape or compound, the sealant will withstand temperatures up to 400°F and pressures up to 200 psi.

Jiffy-Tite® Extension Plugs* – JPB

For Use with Jiffy-Tite or Jiffy-Matic Sockets (Including SV Series)

Threaded area with Jiffy-Seal Thread Sealant pre-applied.

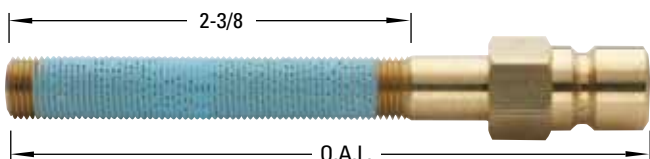

*Designed for use with existing or new NPT tapered pipe-tapped hole in mold or die. Straight threaded area allows easy length adjustment. Cut to suit. No tapering or re-tapping necessary.

PIPE THREAD*	HEX SIZE	O.A.L.	ITEM NUMBER	USED WITH SOCKETS
1/8	7/16	4"	JPB-2514	JS-204-(V/SV) TO JS-226-(V/SV)
1/8	7/16	6"	JPB-2516	
1/8	7/16	8"	JPB-2518	
1/4	9/16	4"	JPB-2524	
1/4	9/16	6"	JPB-2526	
1/4	9/16	8"	JPB-2528	
3/8	11/16	4"	JPB-2534	JS-306-(V/SV) TO JS-328-(V/SV)
3/8	11/16	6"	JPB-2536	
3/8	11/16	8"	JPB-2538	
1/8	9/16	4"	JPB-3514	JS-504-(V) TO JS-526-(V)
1/8	9/16	6"	JPB-3516	
1/8	9/16	8"	JPB-3518	
1/4	9/16	4"	JPB-3524	
1/4	9/16	6"	JPB-3526	
1/4	9/16	8"	JPB-3528	
3/8	11/16	4"	JPB-3534	JS-504-(V) TO JS-526-(V)
3/8	11/16	6"	JPB-3536	
3/8	11/16	8"	JPB-3538	

QUANTITY DISCOUNTS: Jiffy Sockets or Plugs. Discounts apply to current Net Prices. See List Price Adjustment. Standard sizes may be combined on one order for quantity discounts. 50 to 99 Less 15%; 100 or more Less 20%