

1 1/8" T-Series Mold Bases

X-1 = 0.875				11.875 x 12"	
X-2	B	C	H	ITEM NUMBER	NET WT.
1.875	0.875	3	11.25	1212T-17-7	411
	1.375	3	11.75	1212T-17-13	431
	1.875	3	12.25	1212T-17-17	451
2.375	1.375	3.5	12.75	1212T-23-13	457
	1.875	3.5	13.25	1212T-23-17	477
	2.375	3.5	13.75	1212T-23-23	497
2.875	1.375	3.5	13.25	1212T-27-13	477
	1.875	3.5	13.75	1212T-27-17	497
	2.375	3.5	14.25	1212T-27-23	518
3.375	1.875	3.5	14.25	1212T-33-17	518
	2.375	4	15.25	1212T-33-23	543
	2.875	4	15.75	1212T-33-27	564
3.875	1.875	4	15.25	1212T-37-17	543
	2.375	4.5	16.25	1212T-37-23	569
	2.875	4.5	16.75	1212T-37-27	590
4.875	2.375	4.5	17.25	1212T-47-23	610
	2.875	4.5	17.75	1212T-47-27	630
	3.375	4.5	18.25	1212T-47-33	650
5.875	2.875	4.5	18.75	1212T-57-27	670
	3.875	4.5	19.75	1212T-57-37	711
	4.875	4.5	20.75	1212T-57-47	751

X-1 = 0.875				11.875 x 20"	
X-2	B	C	H	ITEM NUMBER	NET WT.
1.875	0.875	3	11.25	1220T-17-7	684
	1.375	3	11.75	1220T-17-13	718
	1.875	3	12.25	1220T-17-17	752
2.375	1.375	3.5	12.75	1220T-23-13	761
	1.875	3.5	13.25	1220T-23-17	795
	2.375	3.5	13.75	1220T-23-23	828
2.875	1.375	3.5	13.25	1220T-27-13	795
	1.875	3.5	13.75	1220T-27-17	828
	2.375	3.5	14.25	1220T-27-23	862
3.375	1.875	3.5	14.25	1220T-33-17	862
	2.375	4	15.25	1220T-33-23	905
	2.875	4	15.75	1220T-33-27	939
3.875	1.875	4	15.25	1220T-37-17	905
	2.375	4.5	16.25	1220T-37-23	949
	2.875	4.5	16.75	1220T-37-27	982
4.875	2.375	4.5	17.25	1220T-47-23	1016
	2.875	4.5	17.75	1220T-47-27	1049
	3.375	4.5	18.25	1220T-47-33	1083
5.875	2.875	4.5	18.75	1220T-57-27	1117
	3.875	4.5	19.75	1220T-57-37	1184
	4.875	4.5	20.75	1220T-57-47	1251

NO. 1 OR NO. 2 STEEL ASSEMBLIES

All plates above ejector housing are No. 1 or No. 2 Steel, respectively.

NO. 3 STEEL ASSEMBLIES

"X-1", "X-2" and "B" Plates are No. 3 Steel.

"A"-Clamping and Support Plates are No. 2 Steel.


NO. 7 STEEL ASSEMBLIES

Any or all plates available as requested.

NOTE: For 3-Plate Extension Bushings, see page 195.

X-1 = 0.875				11.875 x 15"	
X-2	B	C	H	ITEM NUMBER	NET WT.
1.875	0.875	3	11.25	1215T-17-7	513
	1.375	3	11.75	1215T-17-13	539
	1.875	3	12.25	1215T-17-17	564
2.375	1.375	3.5	12.75	1215T-23-13	571
	1.875	3.5	13.25	1215T-23-17	596
	2.375	3.5	13.75	1215T-23-23	621
2.875	1.375	3.5	13.25	1215T-27-13	596
	1.875	3.5	13.75	1215T-27-17	621
	2.375	3.5	14.25	1215T-27-23	647
3.375	1.875	3.5	14.25	1215T-33-17	647
	2.375	4	15.25	1215T-33-23	679
	2.875	4	15.75	1215T-33-27	704
3.875	1.875	4	15.25	1215T-37-17	679
	2.375	4.5	16.25	1215T-37-23	711
	2.875	4.5	16.75	1215T-37-27	737
4.875	2.375	4.5	17.25	1215T-47-23	762
	2.875	4.5	17.75	1215T-47-27	787
	3.375	4.5	18.25	1215T-47-33	812
5.875	2.875	4.5	18.75	1215T-57-27	839
	3.875	4.5	19.75	1215T-57-37	888
	4.875	4.5	20.75	1215T-57-47	939

X-1 = 1.375				11.875 x 23.5"	
X-2	B	C	H	ITEM NUMBER	NET WT.
1.875	1.375	3	12.25	1223T-17-13	883
	1.875	3	12.75	1223T-17-17	923
	2.375	3.5	13.75	1223T-17-23	973
2.375	1.375	3.5	13.25	1223T-23-13	934
	1.875	3.5	13.75	1223T-23-17	973
	2.375	3.5	14.25	1223T-23-23	1013
2.875	1.375	3.5	13.75	1223T-27-13	973
	1.875	3.5	14.25	1223T-27-17	1013
	2.375	3.5	14.75	1223T-27-23	1052
3.375	1.875	3.5	14.75	1223T-33-17	1052
	2.375	4	15.75	1223T-33-23	1103
	2.875	4	16.25	1223T-33-27	1143
3.875	1.875	4	15.75	1223T-37-17	1103
	2.375	4.5	16.75	1223T-37-23	1154
	2.875	4.5	17.25	1223T-37-27	1193
4.875	2.375	4.5	17.75	1223T-47-23	1233
	2.875	4.5	17.75	1223T-47-27	1272
	3.375	4.5	18.25	1223T-47-33	1312
5.875	2.875	4.5	19.25	1223T-57-27	1352
	3.875	4.5	20.25	1223T-57-37	1431
	4.875	4.5	21.25	1223T-57-47	1510

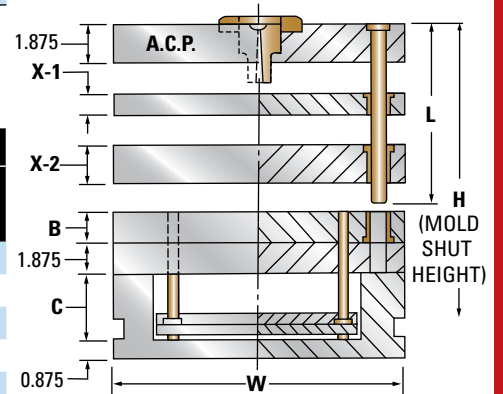

For detailed dimensions, see corresponding size "A" Series Mold Bases.

WHEN ORDERING, PLEASE SPECIFY:

- Quantity & Item Number
- No. 1, No. 2, No. 3 or No. 7 Steel
- Locating Ring Item Number
- E, O and R Dimensions
- L Dimension (Leader Pin Length)
- Method of Shipment