


Armor Step Pins

The Hardened Throughout™ Pin with Armorclad* Coating

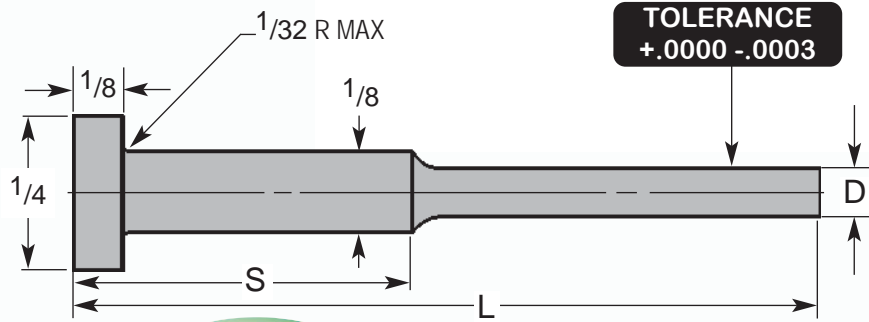

What's Important

- **Armorclad® surface treatment reduces wear, friction, and inhibits corrosion.**
- Armorclad* coating will not chip, crack, or peel from base metal
- Enhances metal hardness, adds lubricity
- As-deposited equivalent hardness of 70 - 72 Rc
- Armorclad* coating has a deposited thickness of 0.000050 to 0.000070
- **Etched for Easy Identification**

Tolerances	
Pin Diameter (D)	+ .0000 - .0003
Shoulder Diameter	+ .000 - .001
Shoulder Length (S)	+ .010 - .010
Head Diameter	+ .000 - .010
Head Thickness	+ .000 - .002
Length (L)	+ .062 - .000

CATALOG NUMBER	D PIN DIA	+.0000 -.0003 ACTUAL SIZE	L LENGTH	S SHOULDER LENGTH	STOCK	
					STD	.005 OS
ARS3-6 1/2	1/32	.0307	6	1/2	•	•
ARS4-6 1/2	3/64	.0464	6	1/2	•	•
ARS5-6 1/2	1/16	.0620	6	1/2	•	•
ARS6-6 1/2	5/64	.0776	6	1/2	•	•
ARS7-6 1/2	3/32	.0933	6	1/2	•	•
ARS8-6 1/2	7/64	.1089	6	1/2	•	•
ARS3-62	1/32	.0307	6	2	•	•
ARS4-62	3/64	.0464	6	2	•	•
ARS5-62	1/16	.0620	6	2	•	•
ARS6-62	5/64	.0776	6	2	•	•
ARS7-62	3/32	.0933	6	2	•	•
ARS8-62	7/64	.1089	6	2	•	•
ARS4-102	3/64	.0464	10	2	•	•
ARS5-102	1/16	.0620	10	2	•	•
ARS6-102	5/64	.0776	10	2	•	•
ARS7-102	3/32	.0933	10	2	•	•
ARS8-102	7/64	.1089	10	2	•	•

Special Size?
Not a Problem!



For oversize pins add "OS" to the end of catalog number (i.e. ARS8-102OS)
*Armorclad Coating of Michigan.

