



# Gib Assemblies

## L-Gibs, Self-Lubricating

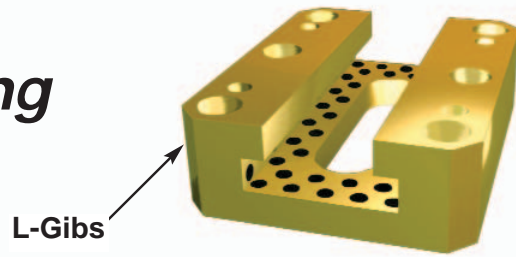

**MATERIAL: Self-Lube Aluminum Bronze**

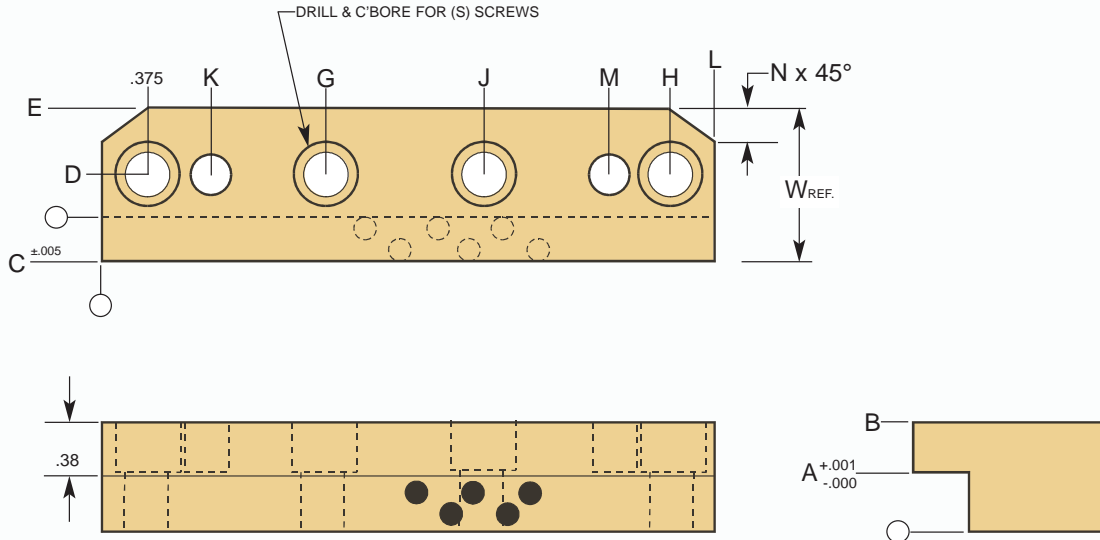

CHAMFERED L-GIBS	L	W +0/-0.005	A	B	C	D	E	G	H	J	K	M	N	HOLES	S
2GAL16GT	2.00	0.750	0.312	0.75	0.188	0.28	0.56		1.625		1.00		.26	2	1/4
2GAL24GT	3.00	0.750	0.312	0.75	0.188	0.28	0.56		2.625		0.88	2.12	.26	2	or M6
2GAL32GT	4.00	0.750	0.312	0.75	0.188	0.28	0.56	2.00	3.625		0.88	3.12	.26	3	
3GAL24GT	3.00	1.000	0.375	0.75	0.250	0.37	0.75		2.625		0.88	2.12	.26	2	5/16
3GAL32GT	4.00	1.000	0.375	0.75	0.250	0.37	0.75	2.00	3.625		0.88	3.12	.26	3	or M8
3GAL40GT	5.00	1.000	0.375	0.75	0.250	0.37	0.75	2.50	4.625		0.88	4.12	.26	3	
4GAL24GT	3.00	1.255	0.500	0.88	0.375	0.37	0.88		2.625		0.88	2.12	.32	2	
4GAL32GT	4.00	1.255	0.500	0.88	0.375	0.37	0.88	2.00	3.625		0.88	3.12	.32	3	5/16 or M8
4GAL40GT	5.00	1.255	0.500	0.88	0.375	0.37	0.88	2.50	4.625		0.88	4.12	.32	3	
4GAL48GT	6.00	1.255	0.500	0.88	0.375	0.37	0.88	2.12	5.625	3.875	0.88	5.12	.32	4	
6GAL32GT	4.00	1.500	0.750	1.25	0.500	0.44	1.00	2.00	3.625		0.88	3.12	.32	3	5/16
6GAL40GT	5.00	1.500	0.750	1.25	0.500	0.44	1.00	2.50	4.325		0.88	4.12	.32	3	or
6GAL48GT	6.00	1.500	0.750	1.25	0.500	0.44	1.00	2.13	5.325	3.875	0.88	5.12	.32	4	M8

Hole locations held ± .005 Tolerances are ± .010 unless otherwise indicated

