


Ready Slide Assembly


Pre-Assembled, Ready-to-Ship

RSA-200 Series

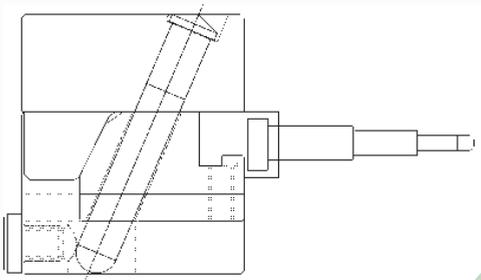

What's Important

- IN STOCK - ready to ship
- Reduces lead time
- Easy installation
- Mounting screws provided
- Units are finished with grind stock on overall width, bottom of wear plate, and wedge angle
- Hardened and precision ground components are made with dissimilar steels and hardnesses
- The lubricious properties of the armorclad treatment combined with the qualities of graphitic tool steel (0-6) provide a dependable, smooth acting slide system

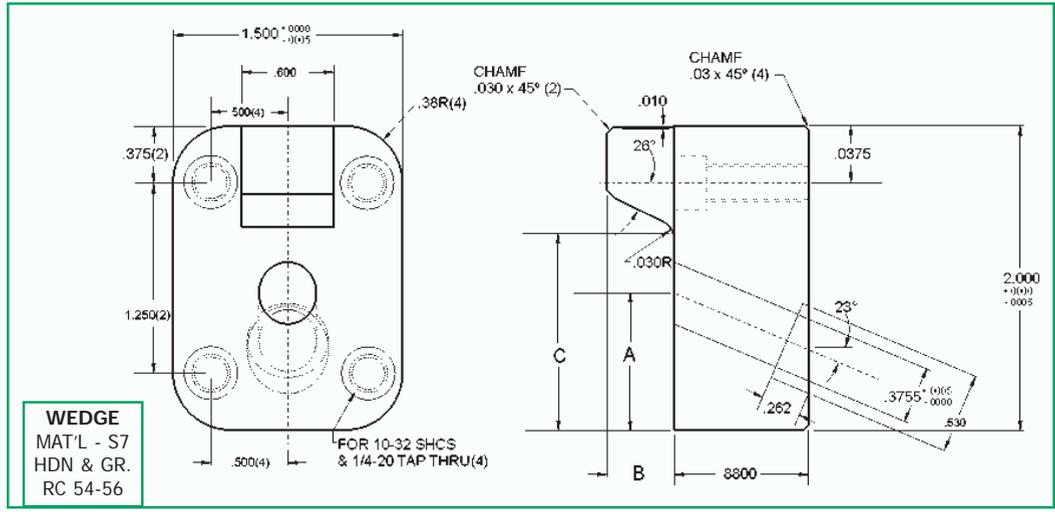

NOTE: New design specifications exclusive to PCS

READY SLIDE ASSEMBLY					WEDGE		
CATALOG NUMBER	OVERALL WIDTH	OVERALL HEIGHT	MAX CAM STROKE	SLIDE WIDTH	A	B	C
RSA-201	1.510	1.765	.500	.625	.900	.440	1.325
RSA-202	1.510	2.265	.600	.625	.690	.620	1.115
RSA-203	1.510	2.765	.600	.625	.690	.620	1.115





To Order Individual Components: add first letter to end of catalog number (i.e. RSA-201 W, for a wedge)



Ready Slide Assembly

Pre-Assembled, Ready-to-Ship

RSA-200 Series

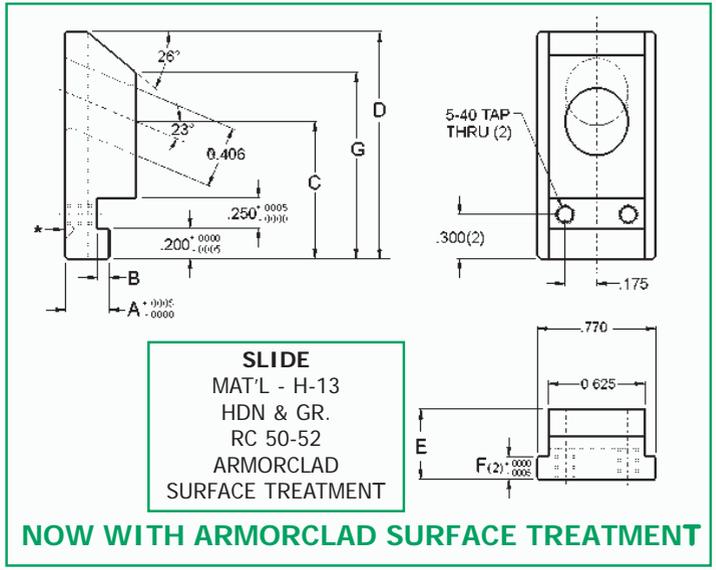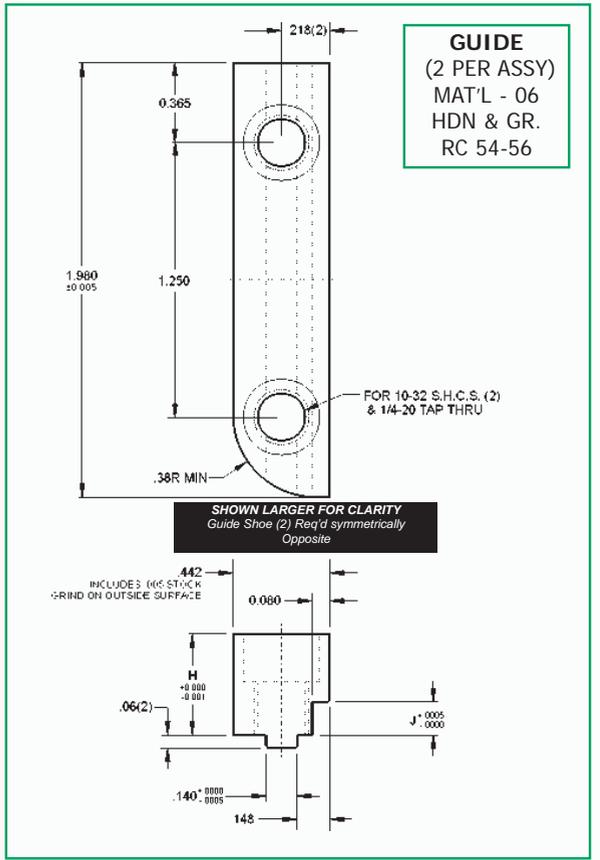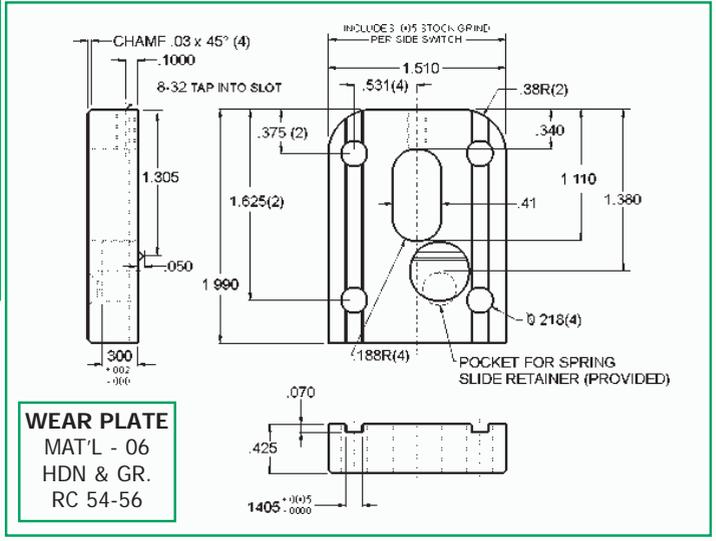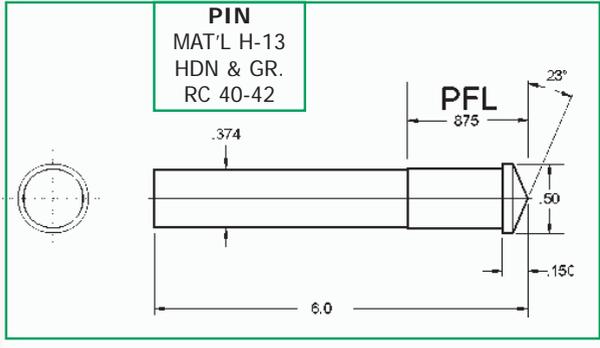

*Slot for slide retainer to be determined at design

CATALOG NUMBER	SLIDE							GUIDE	
	A	B	C	D	E	F	G	H	J
RSA-201	.285	.080	.900	1.490	.460	.150	1.335	.460	.151
RSA-202	.610	.100	.690	1.390	.960	.187	1.125	.960	.188
RSA-203	.850	.100	.690	1.390	1.460	.187	1.125	1.460	.188

All mounting screws provided

Home of the Hardened Throughout™ Pin

