


Brass Pressure Plugs

Threadless Brass Pressure Plugs (Inch) – TBP


- Seals even in rough or corroded holes
- No tapping required
- Withstands pressures up to 72 psi

D-M-E Threadless Brass Pressure Plugs employ a time-saving expandable O-ring design. As the plug's socket head screw is tightened, the O-ring expands to provide a positive seal. No tapping is required and installation or removal is quick and easy. The smaller diameters are ideal for use in cavity inserts or slide blocks where space is limited. **(Not recommended for use in oil lines.)**

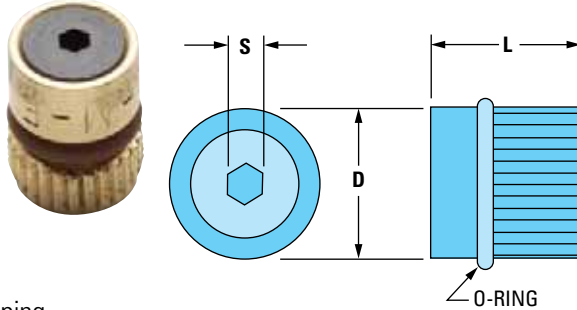

ITEM NUMBER	NOMINAL SIZE	LENGTH L	HEX SIZE S	DRILL SIZE D	VITON REPLACEMENT O-RINGS (PKG. OF 10)
TBP-10	1/8	.50	5/64	11/32	RCV0009
TBP-10-OS	1/8	.50	5/64	23/64	RCV0009
TBP-20	1/4	.56	1/8	7/16	RCV0011
TBP-20-OS	1/4	.56	1/8	29/64	RCV0011
TBP-40	3/8	.62	1/8	9/16	RCV0110
TBP-40-OS	3/8	.62	1/8	37/64	RCV0110
TBP-60	1/2	.62	1/8	11/16	RCV0112
TBP-60-OS	1/2	.62	1/8	45/64	RCV0112

NOTE: O-ring material is suitable for use with temperatures up to 300°F.

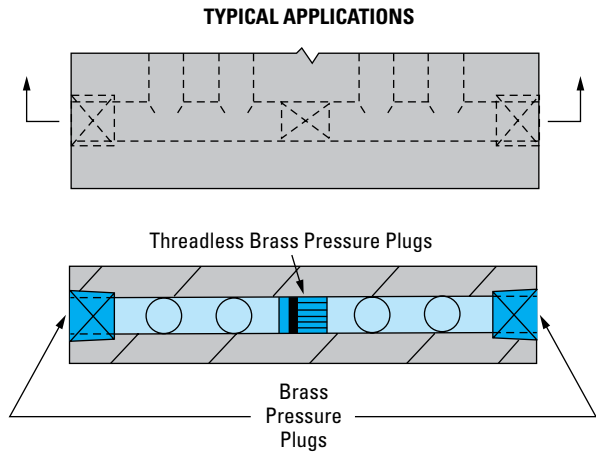


Brass Pressure Plugs (Inch) – BP

- For steam, water or oil lines
- Positive tapered seal
- Withstands pressures up to 600 psi



D-M-E Brass Pressure Plugs give a high-pressure seal through a deliberate difference of taper between the plug and the tapped hole. Flush seating is achieved through closer control of thread forms, sizes and taper.

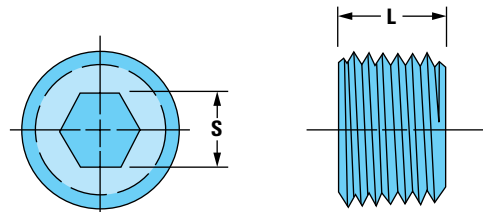


HIGH-PRESSURE SEAL
Dryseal thread form with 7/8 taper per foot. Install in standard 3/4 TPF tapped hole.

ITEM NUMBER	NOMINAL SIZE (NPT)	LENGTH L	HEX SIZE S	THREADS TAP INCH	TAP DRILL
BP-10	1/8	.250	3/16	27	21/64
BP-20	1/4	.406	1/4	18	27/64
BP-40	3/8	.406	5/16	18	9/16
BP-60	1/2	.531	3/8	14	11/16
BP-100	3/4	.531	9/16	14	57/64
BP-140	1	.656	5/8	11 1/2	1 1/8

QUANTITY DISCOUNTS: Threadless and Threaded Brass Pressure Plugs. Sizes may be mixed for quantity discounts. Discounts apply to current Net Prices. 50 to 99 Less 15%; 100 or more Less 20%

Brass Pressure Plugs (Metric) – AN

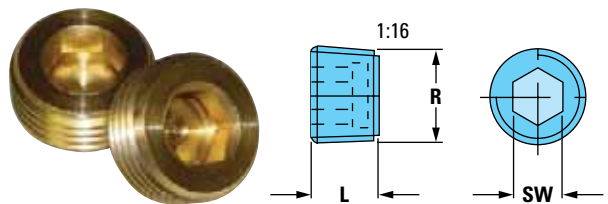

ITEM NUMBER	R	L	SW
AN-8	1/8" BSPT	8	5
AN-4	1/4" BSPT	10	7
AN-3	3/8" BSPT	10	8
AN-10	M 10 X 1	8	5
AN-2	1/2" BSPT	10	10