


JIS Ejector Pins – Straight

JIS Ejector Pins – JFX

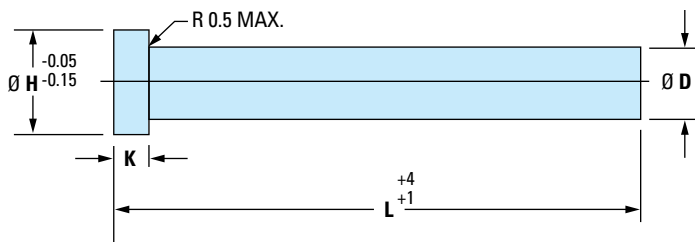

INFORMATION KEY:

- D** = Pin Body Diameter
- H** = Head Diameter
- K** = Head Thickness
- L** = Length
- Standard:** JIS
- Material:** SKD61 (H-13)
- Surface Treatment:** Nitrided
- Surface Hardness:** 70-72 Rc (HV 1000 ± 100)
- Core Hardness:** 40 HRC±2

Ø D PIN DIA	Ø H HEAD DIA	K HEAD THK	ITEM NUMBER (LENGTH L)											
			L=100	L=150	L=200	L=250	L=300	L=350	L=400	L=450	L=500	L=550	L=600	
1.0	5	4	JFX010100	JFX010150										
1.5	5	4	JFX015100	JFX015150	JFX015200									
2	5	4	JFX020100	JFX020150	JFX020200	JFX020250								
2.5	6	4	JFX025100	JFX025150	JFX025200	JFX025250	JFX025300	JFX025350	JFX025400	JFX025450	JFX025500	JFX025550	JFX025600	
3	6	4	JFX030100	JFX030150	JFX030200	JFX030250	JFX030300	JFX030350	JFX030400	JFX030450	JFX030500	JFX030550	JFX030600	
3.5	7	4	JFX035100	JFX035150	JFX035200	JFX035250	JFX035300	JFX035350	JFX035400	JFX035450	JFX035500	JFX035550	JFX035600	
4	8	6	JFX040100	JFX040150	JFX040200	JFX040250	JFX040300	JFX040350	JFX040400	JFX040450	JFX040500	JFX040550	JFX040600	
4.5	8	6	JFX045100	JFX045150	JFX045200	JFX045250	JFX045300	JFX045350	JFX045400	JFX045450	JFX045500	JFX045550	JFX045600	
5	9	6	JFX050100	JFX050150	JFX050200	JFX050250	JFX050300	JFX050350	JFX050400	JFX050450	JFX050500	JFX050550	JFX050600	
5.5	10	6	JFX055100	JFX055150	JFX055200	JFX055250	JFX055300	JFX055350	JFX055400	JFX055450	JFX055500	JFX055550	JFX055600	
6	10	6	JFX060100	JFX060150	JFX060200	JFX060250	JFX060300	JFX060350	JFX060400	JFX060450	JFX060500	JFX060550	JFX060600	
6.5	11	6	JFX065100	JFX065150	JFX065200	JFX065250	JFX065300	JFX065350	JFX065400	JFX065450	JFX065500	JFX065550	JFX065600	
7	11	6	JFX070100	JFX070150	JFX070200	JFX070250	JFX070300	JFX070350	JFX070400	JFX070450	JFX070500	JFX070550	JFX070600	
8	13	8	JFX080100	JFX080150	JFX080200	JFX080250	JFX080300	JFX080350	JFX080400	JFX080450	JFX080500	JFX080550	JFX080600	
9	15	8	JFX090100	JFX090150	JFX090200	JFX090250	JFX090300	JFX090350	JFX090400	JFX090450	JFX090500			
10	15	8	JFX100100	JFX100150	JFX100200	JFX100250	JFX100300	JFX100350	JFX100400	JFX100450	JFX100500	JFX100550	JFX100600	
12	17	8	JFX120100	JFX120150	JFX120200	JFX120250	JFX120300	JFX120350	JFX120400	JFX120450	JFX120500	JFX120550	JFX120600	
15	20	8	JFX150100	JFX150150	JFX150200	JFX150250	JFX150300	JFX150350	JFX150400	JFX150450	JFX150500	JFX150550	JFX150600	

Ø D PIN DIA	Ø H HEAD DIA	K HEAD THK	ITEM NUMBER (LENGTH L)							
			L=650	L=700	L=750	L=800	L=900	L=1000	L=1200	
2.5	6	4	JFX025650							
3	6	4	JFX030650	JFX030700						
3.5	7	4	JFX035650	JFX035700	JFX035750					
4	8	6	JFX040650	JFX040700	JFX040750					
4.5	8	6	JFX045650	JFX045700	JFX045750					
5	9	6	JFX050650	JFX050700	JFX050750					
6	10	6	JFX060650	JFX060700	JFX060750	JFX060800				
7	11	6	JFX070650	JFX070700	JFX070750	JFX070800				
8	13	8	JFX080650	JFX080700	JFX080750	JFX080800	JFX080900	JFX0801000	JFX0801200	
10	15	8	JFX100650	JFX100700	JFX100750	JFX100800	JFX100900	JFX1001000	JFX1001200	
12	17	8	JFX120650	JFX120700	JFX120750	JFX120800	JFX120900	JFX1201000	JFX1201200	
15	20	8	JFX150650	JFX150700	JFX150750	JFX150800	JFX150900	JFX1501000	JFX1501200	

JIS TOLERANCES		
PIN DIA Ø D	Ø D	TOL
	1.0	-0.005
	1.5	-0.012
HEAD THICK K	THI	TOL
	4	0 -0.020
	6 TO 8	0 -0.030

KEY TO CHART

- Items in stock
- Contact D-M-E for quote

NOTE: All dimensions are in mm.

HOW TO ORDER: Use Item Number in charts above for ordering.