5" x 6" U 3-Plate Mold Bases – 56U3

These 3-plate assemblies are designed for use with D-M-E Universal Adapter Plates.

Ejector stroke data
C = (height of riser) = 1.625
S = (max. stroke of ejector bar) = .750

WHEN ORDERING PLEASE SPECIFY:
1. Quantity & Item Number
2. Type of Sprue Bushing ("U", "UV" or "UR" Series) see D-M-E Sprue Bushings
3. O & R Dimensions
   O = .15625, .21875 or .28125
   R = .500 or .750 ("U" Series)
   500 ("UV" Series Standard)
   or .750 ("UV" Series Special)
   No spherical radius on "UR" Series
4. Method of Shipment

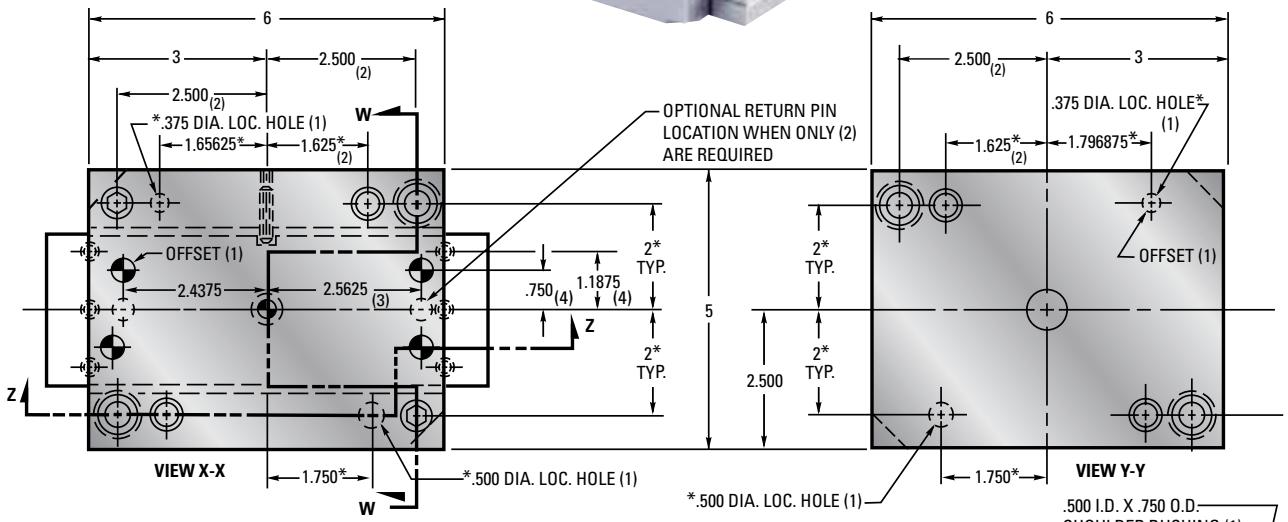

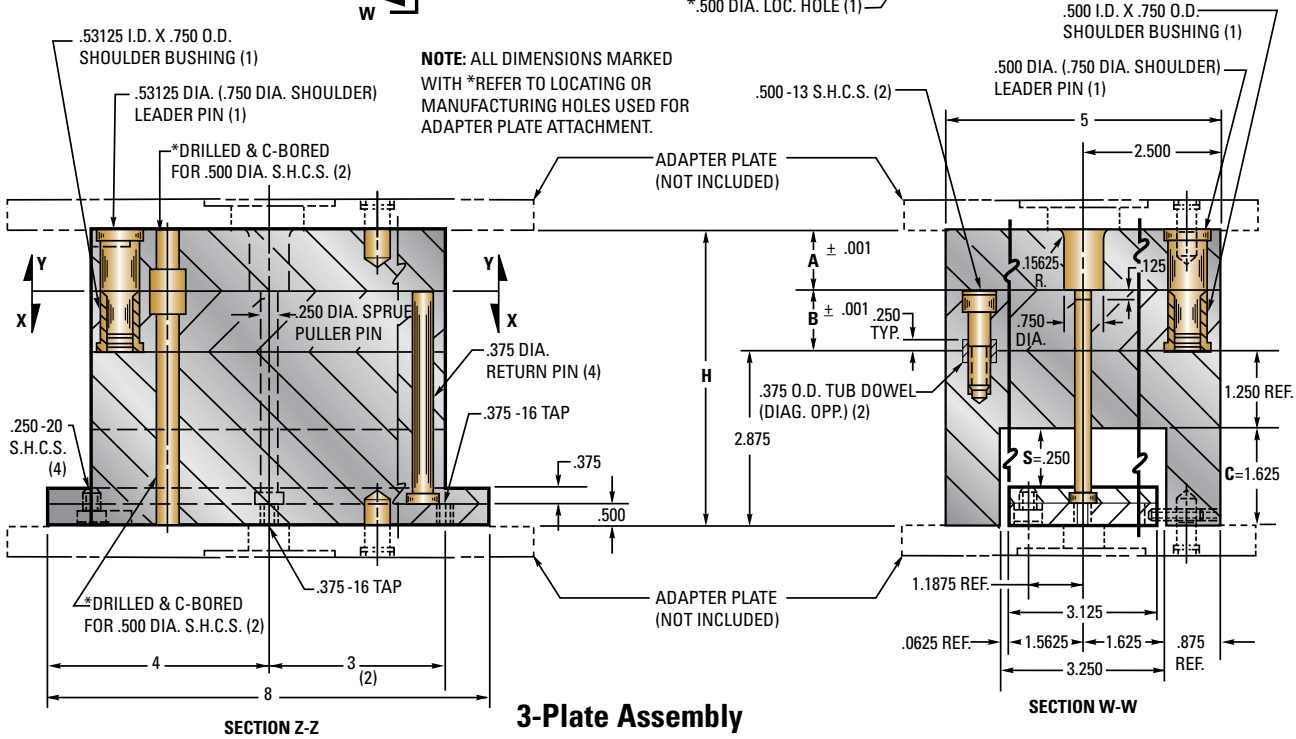

3-Plate Assembly

A	B	ITEM NUMBER	H	OVERALL ASSEMBLY HEIGHT INCLUDING ADAPTER PLATES	NET WT.
7/8	7/8	56U3-7-7	4 5/8	6 3/8	37
7/8	1 3/8	56U3-7-13	5 1/8	6 7/8	41
7/8	1 7/8	56U3-7-17	5 5/8	7 3/8	46
1 3/8	7/8	56U3-13-7	5 1/8	6 7/8	41
1 3/8	1 3/8	56U3-13-13	5 5/8	7 3/8	46

A	B	ITEM NUMBER	H	OVERALL ASSEMBLY HEIGHT INCLUDING ADAPTER PLATES	NET WT.
1 3/8	1 7/8	56U3-13-17	6 1/8	7 7/8	37
1 7/8	7/8	56U3-17-7	5 5/8	7 3/8	46
1 7/8	1 3/8	56U3-17-13	6 1/8	7 7/8	50
1 3/8	1 7/8	56U3-17-17	6 5/8	8 3/8	54