
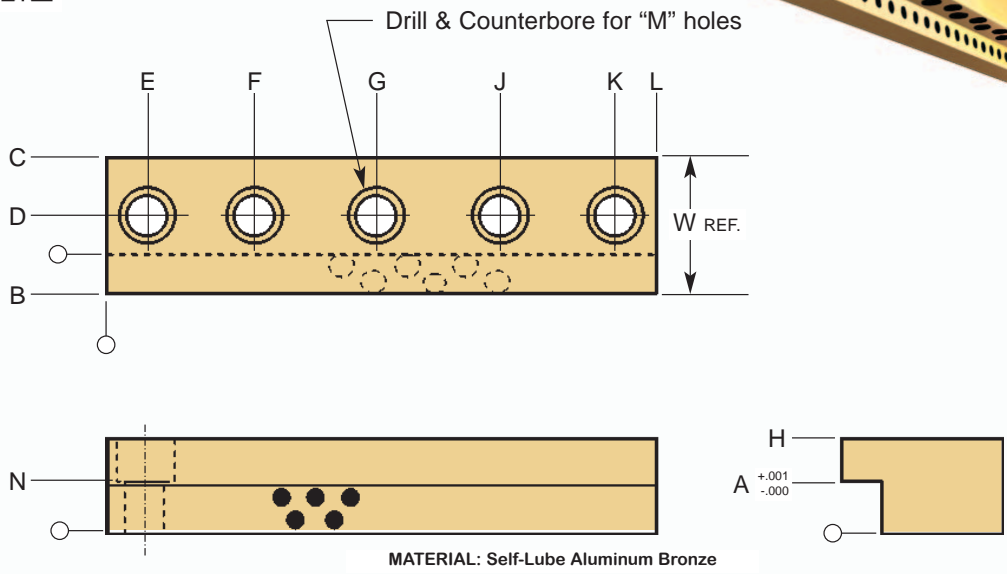


L-Gibs Self-Lubricating, Aluminum Bronze

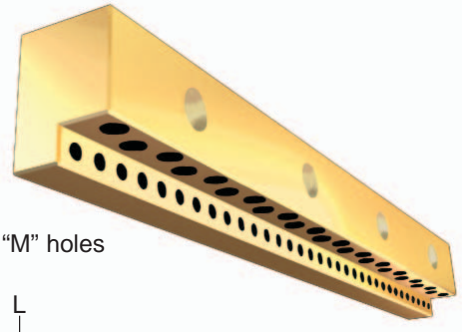

- Tolerances are $\pm .010$ unless otherwise indicated
- Material: Aluminum Bronze with graphite plugs
- Hole locations are $\pm .005$

DRILLED	NOT DRILLED															
CATALOG NO.	CATALOG NO.	L	W	H	A	B	C	D	E	F	G	J	K	M	N	
2LG42G	2LG42NG	5.25	.75	.75	.312	.18	.56	.28	.88	-	2.62	-	4.38	3	1/4 OR M6	.25
2LG56G	2LG56NG	7.00							.88	2.62	-	4.38	6.12	4		
2LG70G	2LG70NG	8.75							.88	2.62	4.38	6.12	7.88	5		
3LG48G	3LG48NG	6.00	1.00	.75	.375	.25	.75	.38	1.00	-	3.00	-	5.00	3	5/16 OR M8	.31
3LG64G	3LG64NG	8.00							1.00	3.00	-	5.00	7.00	4		
3LG80G	3LG80NG	10.00							1.00	3.00	5.00	7.00	9.00	5		
4LG48G	4LG48NG	6.00	1.25	.88	.500	.38	.88	.44	1.00	-	3.00	-	5.00	3	3/8 OR M10	.50
4LG60G	4LG60NG	7.50							1.25	-	3.75	-	6.25	3		
4LG80G	4LG80NG	10.00							1.25	3.75	-	6.25	8.75	4		
4LG100G	4LG100NG	12.50							1.25	3.75	6.25	8.75	11.25	5		
6LG48G	6LG48NG	6.00	1.50	1.25	.750	.50	1.00	.50	1.00	-	3.00	-	5.00	3	3/8 OR M10	.75
6LG72G	6LG72NG	9.00							1.50	-	4.50	-	7.50	3		
6LG96G	6LG96NG	12.00							1.50	4.50	-	7.50	10.50	4		
6LG120G	6LG120NG	15.00							1.50	4.50	7.50	10.50	13.50	5		
7LG64G	7LG64NG	8.00	2.00	1.50	.875	.62	1.37	.68	1.00	3.00	-	5.00	7.00	4	1/2 OR M12	.75
7LG96G	7LG96NG	12.00							1.50	4.50	-	7.50	10.50	4		
7LG128G	7LG128NG	16.00							2.00	6.00	-	10.00	14.00	4		
10LG96G	10LG96NG	12.00							1.50	4.50	-	7.50	10.50	4		
10LG144G	10LG114NG	18.00	2.50	2.00	1.250	.75	1.75	.88	2.25	6.75	-	11.25	15.75	4	5/8 OR M16	1.25
10LG192G	10LG192NG	24.00							3.00	9.00	-	15.00	21.00	4		
12LG96G	12LG96NG	12.00	3.00	2.50	1.500	1.00	2.00	1.00	1.50	4.50	-	7.50	10.50	4	5/8 OR M16	1.75
12LG144G	12LG144NG	18.00							2.25	6.75	-	11.25	15.75	4		
12LG192G	12LG192NG	24.00							3.00	9.00	-	15.00	21.00	4		

G - Drilled Mounting Holes, Self Lube
NG - Un-drilled, Self Lube

